




FX-640 Polyurea Elastomeric Lining is Applied to Create a Bio-Secure Area to Prevent Spread of Animal Diseases



FX-640 Tan, an aromatic polyurea, is sprayed on walls at 60-80 mils per coat. **FX-640** is also applied to floors at 80-100 mils per coat. The yellow surface is **FX-641 Primer**, which is applied to concrete prior to **FX-640**.

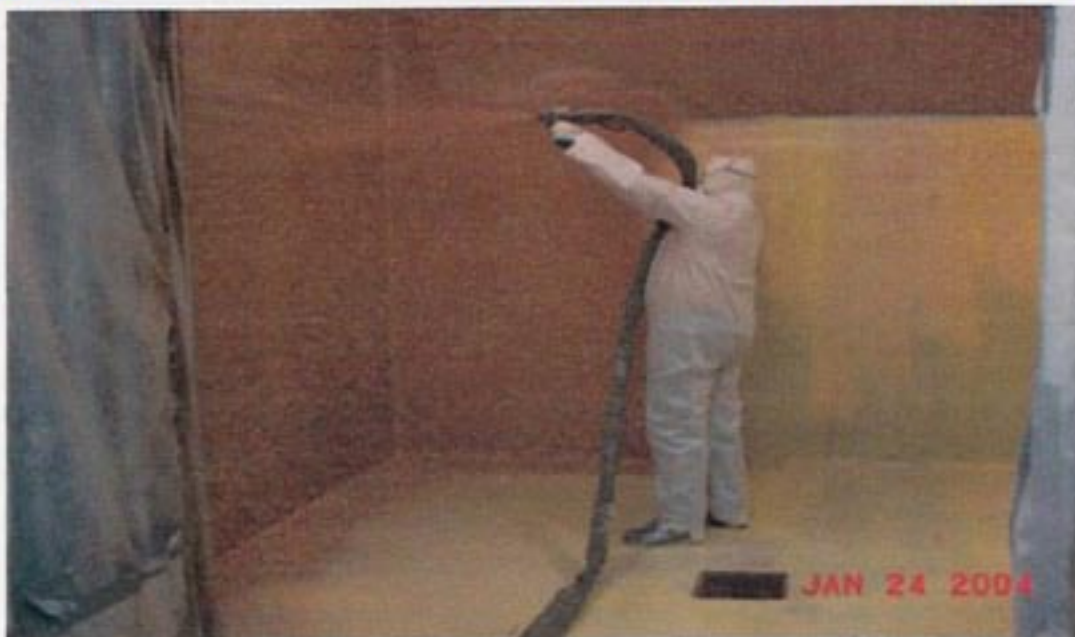

FX-640 resists aggressive chemicals used daily for cleaning and high pressure washing. **FX-640** is applied in multiple passes in cross hatch pattern to achieve desired uniform thickness at required mils.